

Application

For use with differential transmitters, chart recorders or field meters. Two shut off valves, two equalizing valves and one vent valve all in one block.

Standard Features

Sizes

1/2" NPT X 1/2" NPT , 1/2" NPT x Flange

Maximum Operating pressure

6,000 psi / 21,000 kpa / 210 bar

Body Material

A105 carbon steel / 316 stainless steel

Bonnet Material

A105 carbon steel / 316 stainless steel

Stem material

316 stainless steel , back seated to ensure prevention of stem blow out or bonnet removal

Handle

A105 carbon steel / 316 stainless steel

Dust cap

Aluminum

Packing Material

PTFE Teflon, Optional materials available Packing located below threads to insure clean smooth operation.

Stem (Isolation Valve)

Non Rotating

Temperature limits

Teflon (-40 to 250°C / -40 to 500°F)

Traceability

Each valve has a number stamped on it traceable to a MTR. The hard copies are available upon request.

Canadian Registration Number (CRN)


OC5141.25C





Optional Features (minimum order may apply)

- Pipe mounting kit
- Grafoil packing
- Oxygen cleaned
- NACE (MR0175, 2003 revision)
- Exotic materials
- Contact us for any other special requirements

NPT x NPT

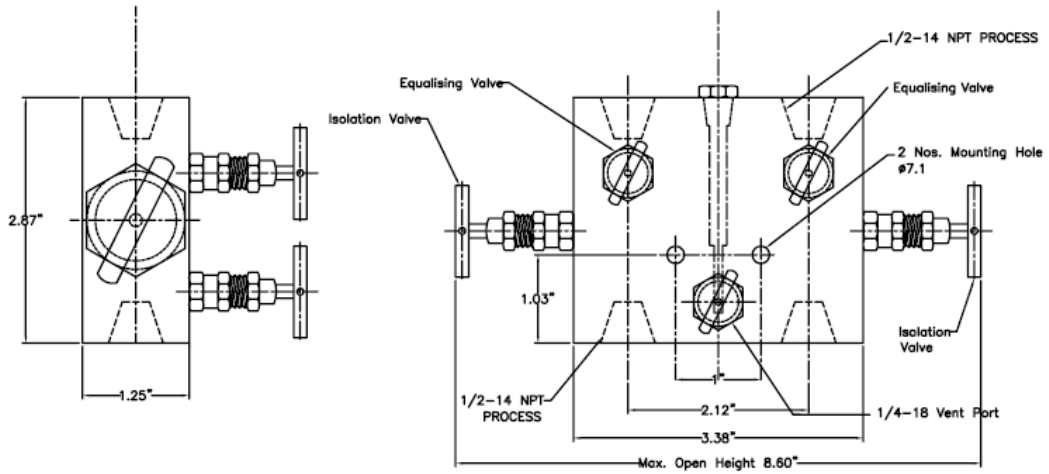

NPT x Flange

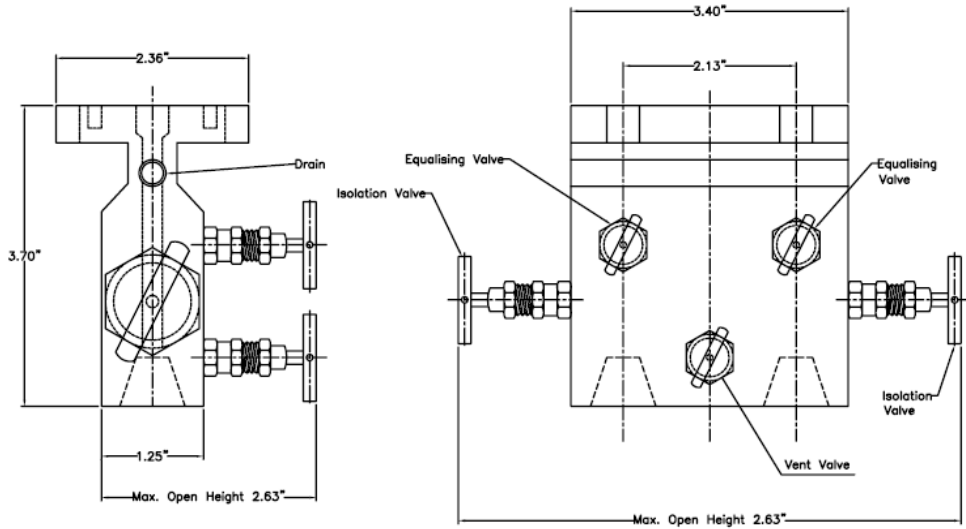

No.	Part.	WM555	WM553
1	Handle	CS	SS
2	Spindle	CS	SS
3	Dust cap	Plastic	Plastic
4	Nut	CS	SS
5	Identification ring	Aluminum	Aluminum
6	Gland	CS	SS
7	Body	CS	SS
8	Lock pin	SS	SS
9	Packing	PTFE / Grafoil	PTFE / Grafoil

Part No.	Size	Pattern	Material
WM55514	1/2"	NPT X PIPE	A105 C/S
WM55514FN	1/2" X FL	NPT X FLANGE	A105 C/S
WM55314	1/2"	NPT X PIPE	SST
WM55314FN	1/2" X FL	NPT X FLANGE	SST

Western Gauge & Instruments Ltd. – Head Office
 1,2 4045 – 74 Ave S.E.
 Calgary, AB T2C 1H5
 Ph: (403) 236-4888 Fax: (403) 236-7629
 Email: sales@wgilt.com

Western Gauge & Instruments Ltd. – Branch Office
 6624 – 50th Street
 Edmonton, AB T6B 2N7
 Ph: (780) 463-3800 Fax: (780) 463-3990
 Email: edm@wgilt.com