

WGI Hot Water Heating Thermometer

WGI hot water thermometers are typically used in hot water heating systems, boilers and hydronic heating systems, etc. Each thermometer comes standard with a 1/2" NPT or 1/2" solder removable brass thermowell for maintaining a sealed system. In addition WGI hot water thermometers come standard with a rear recalibration screw.

WGI Hot Water Thermometer

Case

Polished Aluminum

Range

30° to 240° F/C

Connection


Comes with 1/2" npt brass thermowell

Dial Size

2 1/2"

Accuracy

± 2°F or 1°C

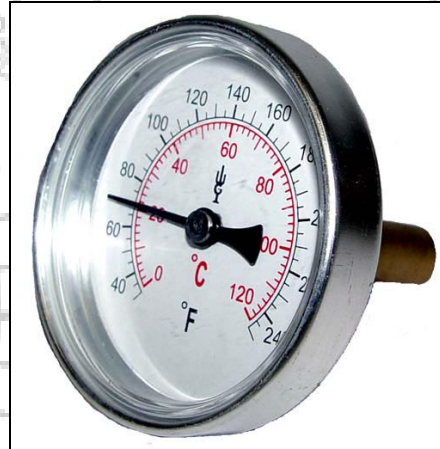

Part Number	Temp Range	List Price	Discount Line #
HWT2.5/250	30°/240° F/C	23.17	27
Thermowells			
HWT-SOLDER		\$11.83	27
HWT-NPT		\$11.83	27

Magnetic Surface Thermometer

WGI bi-metal magnetic surface thermometers are ideal for use on engines, bearings, pipes, tanks, ovens, dies, molds or any flat metallic surface. Rear recalibration adjustment standard.

WGI Pocket Test Thermometer

Dial Size

2"

Lens

Clear acrylic

Case


Black aluminum

Mounting

Two magnets on rear of case

Accuracy

± 2% full scale

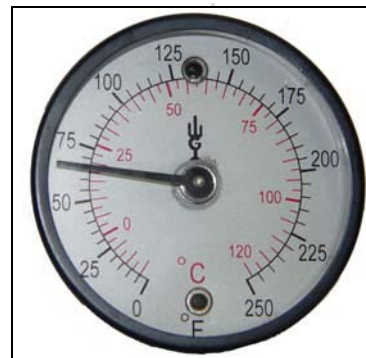

Part Number	Temp Range	List Price	Discount Line #
311FC	-100 to 160° F/C	\$93.33	29
312FC	0 to 250° F/C	\$93.33	29
313FC	50° to 500° F/C	\$93.33	29